

## DESICCATORS

Complete with perforated porcelain plate.



HR-G0221



HR-G0223

Technical Specifications:

Product Code	Product Name	Diameter (cm)	Dimensions (cm)	Weight (kg)
HR-G0220	Non-Vacuum Desiccator	Ø 21	31x31x25	3,5
HR-G0221	Non-Vacuum Desiccator	Ø 24	34x34x30	3,5
HR-G0222	Non-Vacuum Desiccator	Ø 30	40x40x35	3,5
HR-G0223	Vacuum Desiccator	Ø 21	31x31x25	3,5
HR-G0224	Vacuum Desiccator	Ø 24	34x34x30	3,5
HR-G0225	Vacuum Desiccator	Ø 30	40x40x35	3,5
HR-G0229	Safety Cage	---	---	2


## GRID SIEVES

STANDARDS: EN 933-3

Used to determine the flakiness index of the aggregates. Consists of electrostatic painted frame and 5 mm diameter stainless steel bars.

50 mm aperture Sieve is not supplied with Complete Set and should be ordered separately.

HR-A5001

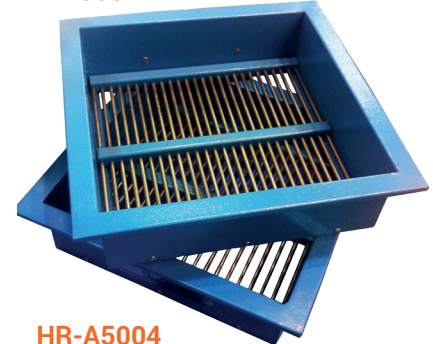

HR-A5004

Technical Specifications:

Product Code	Product Name	Aperture (mm)	Dimensions (cm)	Weight (kg)
HR-A5001	Grid Sieve	2,5	34x32x8	4
HR-A5002	Grid Sieve	3,15	34x32x8	4
HR-A5003	Grid Sieve	4	34x32x8	4
HR-A5004	Grid Sieve	5	34x32x8	4
HR-A5005	Grid Sieve	6,3	34x32x8	4
HR-A5006	Grid Sieve	8	34x32x8	4
HR-A5007	Grid Sieve	10	34x32x8	4
HR-A5008	Grid Sieve	12,5	34x32x8	4
HR-A5009	Grid Sieve	16	34x32x8	4
HR-A5010	Grid Sieve	20	34x32x8	4
HR-A5011	Grid Sieve	25	34x32x8	4
HR-A5012	Grid Sieve	31,5	34x32x8	4
HR-A5013	Grid Sieve	40	34x32x8	4
HR-A5014	Grid Sieve	50	34x32x8	4
HR-A5000/S	Grid Sieve Set	Complete Set	34x32x104	52